

Total Maximum Daily Load
For Turbidity
Storm Lake
Buena Vista County, Iowa

2005

Iowa Department of Natural Resources
TMDL & Water Quality Assessment Section



Table of Contents

1. Executive Summary	2
2. Storm Lake, Description and History	5
2.1 The Lake	5
<i>Morphometry</i>	5
<i>Hydrology</i>	6
2.2 The Watershed	6
<i>Current Watershed Conditions</i>	6
3. TMDL for Turbidity	7
3.1 Problem Identification	7
<i>Impaired Beneficial Uses and Applicable Water Quality Standards</i>	7
<i>Data Sources</i>	8
<i>Interpreting Storm Lake Water Quality Data</i>	9
<i>Potential Pollution Sources for Turbidity and Suspended Solids</i>	12
3.2 TMDL Target	15
<i>Criteria for Assessing Water Quality Standards Attainment</i>	16
<i>Selection of Environmental Conditions</i>	16
<i>Waterbody Pollutant Loading Capacity</i>	16
3.3 Pollution Source Assessment	16
<i>Existing Load</i>	16
<i>Departure from Load Capacity</i>	17
<i>Identification of Pollutant Sources</i>	17
3.4 Pollutant Allocation	17
<i>Wasteload Allocation</i>	17
<i>Load Allocation</i>	17
<i>Margin of Safety</i>	18
<i>Total Daily Maximum Load Equation</i>	18
4. Implementation Plan	18
5. Monitoring	19
6. Public Participation	19
7. References	20
8. Appendix A - Lake Hydrology	21
<i>General Methodology</i>	21
<i>Application to Storm Lake - Calculations</i>	25
9. Appendix B - Sampling Data	26
10. Appendix C - Trophic State Index	31
<i>Carlson's Trophic State Index</i>	31
11. Appendix D - Maps	33

1. Executive Summary

Table 1. Storm Lake Summary

Waterbody Name:	Storm Lake
County	Buena Vista
Use Designation Class	Primary contact recreation, A1 Aquatic life, B(LW)
Major River Basin	Des Moines River Basin
Pollutant	Turbidity
Pollutant Sources	Wind resuspension of total suspended solids
Impaired Use	Primary contact recreation
2002 303d Priority	Medium
Watershed Area	13,770 acres
Lake Area	3,150 acres
Lake Volume	24,900 acre-ft (30.8 million m ³)
Detention Time, based on outflow	2.6 years
Target, turbidity measured as secchi depth	0.7 meters
Target, average total suspended solids (TSS) concentration, as related to secchi depth	20 mg/l (680 tons in a volume of 30.8 million cubic meters)
Existing average TSS concentration and secchi depth	48 mg/l (1620 tons in a volume of 30.8 million cubic meters), secchi depth = 0.4 m
TSS load reduction as a concentration to achieve target	Reduce average water column TSS concentration by 28 mg/l (950 tons in a volume of 30.8 million cubic meters)
Wasteload Allocation	Zero, no permitted point sources in watershed

Table 1a. Load Allocation, based on lake bottom area disturbed by wind induced waves

Extent of wave disturbed lake bottom area, acres	Load Allocation, tons per disturbed lake bottom acre to achieve 20 mg/l TSS (612 tons total load)	Load per unit area, pounds/square foot of lake bottom (20 mg/l TSS at 612 tons total load)
500	1.22	0.0562
1000	0.61	0.0281
1500	0.41	0.0187
2000	0.31	0.0140
2500	0.24	0.0112
3000	0.20	0.0094

The Federal Clean Water Act requires the Iowa Department of Natural Resources (IDNR) to develop a total maximum daily load (TMDL) for waters that have been identified on the state's 303(d) list as impaired by a pollutant. Storm Lake has been identified as impaired by turbidity. The purpose of the TMDL for Storm Lake is to

calculate the allowable sediment load for the lake that will meet water quality standard turbidity levels.

This document consists of a single TMDL for turbidity designed to provide Storm Lake water quality that fully supports its designated uses. The primary source of turbidity causing the impaired condition is the resuspension of lake bottom sediment by wind induced waves. Based on previous studies, local information and IDNR staff; sediment delivered to the lake from the watershed and resuspension by bottom rough fish such as carp, are minor causes of turbidity. This TMDL targets sediment resuspended by waves and measured as total suspended solids to address the turbidity impairment.

This TMDL has two phases. Phase 1 consists of setting specific and quantifiable targets for secchi depth transparency and total suspended solids. The waterbody load capacity, existing pollutant load in excess of this capacity, and the source load allocation is estimated based on currently available information. Phase 2 will consist of implementing the load reduction and monitoring plans, evaluating collected data, and readjusting target values if needed.

Phasing TMDLs is an iterative approach to managing water quality employed when the origin, nature and sources of water quality impairments are not well understood. The monitoring plan provides data that determines if load reductions result in attainment of water quality standards. Monitoring activities may include routine sampling and analysis, biological assessment, fisheries studies, and watershed and/or waterbody modeling. Section 5.0 of this TMDL includes a monitoring plan description. Monitoring:

- Assesses the future beneficial use status;
- Detects water quality trends
- Evaluates effectiveness of implemented best management practices

The Storm Lake TMDL for turbidity has been prepared in compliance with the current regulations for TMDL development that were promulgated in 1992 as 40 CFR Part 130.7. These regulations and consequent TMDL development are summarized below:

- 1. Name and geographic location of the impaired or threatened waterbody for which the TMDL is being established:** Storm Lake, S10, T90N, R37W, on the southern edge of the City of Storm Lake, Buena Vista County.
- 2. Identification of the pollutant and applicable water quality standards:** The pollutant causing the water quality impairments is turbidity associated primarily with internal sediment cycling. Designated uses for Storm Lake are Primary Contact Recreation (Class A1) and Aquatic Life (Class B(LW)). Excess turbidity has impaired aesthetic and aquatic life water quality narrative criteria (567 IAC 61.3(2)) so that designated uses are not supported.
- 3. Quantification of the pollutant load that may be present in the waterbody and still allow attainment and maintenance of water quality standards:** The Phase 1 target of this TMDL is a secchi depth transparency of 0.7 meters. This is equivalent to an average total suspended solids concentration of 20 mg/l.

- 4. Quantification of the amount or degree by which the current pollutant load in the waterbody, including the pollutant from upstream sources that is being accounted for as background loading, deviates from the pollutant load needed to attain and maintain water quality standards:** The estimated existing average TSS as measured by concentration is 48 mg/l. The TSS concentration difference is 28 mg/l. To achieve and maintain lake water quality goals and protect for beneficial uses, an average TSS concentration of 20 mg/l is required.
- 5. Identification of pollution source categories:** Nonpoint sources, primarily in the form of resuspended sediments, have been identified as the cause of the turbidity impairment to Storm Lake.
- 6. Wasteload allocations for pollutants from point sources:** There are no permitted point sources in the Storm Lake watershed and the wasteload allocation is zero.
- 7. Load allocations for pollutants from nonpoint sources:** The total suspended solids load is based on the areal load. See Table 1a above for the load allocation.
- 8. A margin of safety:** The margin of safety of 68 tons for this TMDL is an explicit 10 percent reduction in the load allocation.
- 9. Consideration of seasonal variation:** This TMDL was developed based annual TSS loads that will result in attainment of secchi depth targets year round.
- 10. Allowance for reasonably foreseeable increases in pollutant loads:** An allowance for increased TSS load was not included in this TMDL. The primary source of Storm Lake turbidity is resuspended bottom sediment that results from wind driven waves and currents and the shallowness of Storm Lake for its fetch distance. The wind and lake size are characteristics that will not change. A long-term program of dredging is currently increasing the lake depth. Significant changes in the Storm Lake watershed landuse are unlikely.
- 11. Implementation plan:** Although not required by the current regulations, an implementation plan is outlined in Section 4 of this document.

2. Storm Lake, Description and History

2.1 The Lake

Storm Lake is one of Iowa's 34 natural, glacial lakes and is located on the south edge of Storm Lake, Iowa. Approximately 30% of the shoreline of Storm Lake is in public land including City of Storm Lake parks, City of Lakeside parks, one Buena Vista County park, the City of Storm Lake campground, and five boat ramps. The lake and park areas provide facilities for fishing, camping, boating and picnicking. Park use is approximately 267,000 visits per year.

Approximately 155 acres of the lake were dredged in the 1960s. A dredging project is currently underway in Storm Lake with plans to dredge an area of 1,300 acres to a depth of at least 13 feet.

Table 2. Storm Lake Characteristics

Waterbody Name:	Storm Lake
Hydrologic Unit Code:	HUC10 0710000603
IDNR Waterbody ID:	IA 04-RAC-00530-L
Location:	Section 10 T90N R37W
Latitude:	42° 38' N
Longitude:	95° 12' W
Water Quality Standards Designated Uses:	1. Primary Contact Recreation (A1) 2. Aquatic Life Support (B(LW))
Tributaries:	Powell Creek
Receiving Waterbody:	Outlet Creek to North Raccoon River
Lake Surface Area:	3,150 acres
Maximum Depth:	14 feet (does not include recent or planned dredging)
Mean Depth:	8 feet (does not include recent or planned dredging)
Volume:	24,900 acre-feet (30.8 million cubic meters)
Length of Shoreline:	52,500 feet
Watershed Area:	14,700 acres
Watershed/Lake Area Ratio:	4.4:1
Estimated Detention Time:	2.6 years

Morphometry

Storm Lake has a mean depth of 8 feet and a maximum depth of 14 feet. The lake surface area is 3,150 acres and the storage volume is 24,940 acre-feet. These measurements do not reflect the recent dredging in Storm Lake.

Temperature and dissolved oxygen sampling indicate that Storm Lake remains oxic and relatively well mixed through much of the growing season. The lake is approximately 3.5 miles long and 2 miles wide and has shoreline development ratio of 4.2.

Hydrology

Water from Powell Creek flows into Little Storm Lake then into Storm Lake. Little Storm Lake is an open water and marsh area located on the northwest edge of Storm Lake. Little Storm Lake is 190 acres and includes the Little Storm Lake Management Area.

The estimated annual average detention time for Storm Lake is 2.6 years based on outflow. The methodology and calculations used to determine the detention time are shown in Appendix A.

2.2 The Watershed

The Storm Lake watershed has an area of approximately 14,700 acres excluding the lake and has a watershed to lake ratio of 4.4:1. Land use data was collected in 2002-2003 through a developmental grant from the Iowa Department of Agriculture and Land Stewardship, Division of Soil Conservation. Row crop and CRP acres were updated in 2002 by the Buena Vista County SWCD for the Storm Lake watershed. The land uses and associated areas for the watershed are shown in Table 3.

Table 3. 2002-03 Landuse in Storm Lake watershed.

Landuse	Area in Acres	Percent of Total Area
Cropland	10,990	75
Urban	1,530	10
CRP/Hay	760	5
Timber/Marsh/Park	370	3
Farmsteads	350	2
Pasture	100	1
Other	600	4
Total	14,700	100

Topography of the watershed varies from level to moderately sloping. Soils of the watershed include the Sac-Primghar-Galva soil associations. These soils vary from well drained to poorly drained and are moderately erodable. Average rainfall in the area is 35 inches/year, with the greatest monthly amount (5.0 inches) occurring in June (DSC-DNR, 1991).

The urban areas of Alta, Storm Lake, and Lakeside lie within the watershed boundaries as well as unincorporated urban areas on the south and west sides of the lake. The Lake receives urban runoff from Storm Lake through 54 storm sewer outfalls.

Current Watershed Conditions

Many best management practices and one structure are in place in the Storm Lake watershed. These include conservation tillage, contour farming, terrace construction, integrated crop management, buffer filter strips and riparian strips. The control structure and sedimentation pond was constructed on Episcopal Creek.

A long-term commitment between the DNR, the Iowa Department of Agriculture and Land Stewardship (IDALS), Natural Resource Conservation Service (NRCS) and the Iowa Lakes Resource Conservation and Development (RCD) office, has worked to

significantly reduce watershed erosion and nutrient delivery to Storm Lake. This commitment began in the 1989 with the creation of the Storm Lake Water Quality Protection Project funded through Section 319 funds. The project was completed in 2000 and included the installation of 6900 acres of conservation tillage, 7850 feet of terraces, 222 acres of contour farming, 7000 acres of integrated crop management, and 87 acres of filter strips and wetlands. Estimated soil saved through the implemented practices is 19,150 tons/year.

Activities in the watershed since 1990 have worked to reduce sediment and nutrient delivery to Storm Lake via Little Storm Lake; however, work remains to be done within Little Storm Lake. Another 319 project began in 2004 with funding for three years.

3. TMDL for Turbidity

3.1 Problem Identification

Impaired Beneficial Uses and Applicable Water Quality Standards

The *Iowa Water Quality Standards* designated uses for Storm Lake are Primary Contact Recreation (Class A) and Aquatic Life (Class B(LW)). Storm Lake also has general uses of secondary contact recreation, domestic uses, and wildlife uses.

Storm Lake was put on the 2002 impaired waters list due to partial support of primary contact recreation use caused by aesthetically objectionable turbidity that is a combination of inorganic material and blooms of algae. The State of Iowa does not have numeric water quality criteria for turbidity but the turbidity can be evaluated using transparency as measured by secchi depth, the concentration of total suspended solids as compared to other lakes, and the partitioning of suspended solids into inorganic and volatile fractions. The applicable water quality standard is:

61.3(2)c: Such waters shall be free from materials attributable to wastewater discharges or agricultural practices producing objectionable color, odor, or other aesthetically objectionable conditions.

The rationale for the IDNR 2002 Storm Lake water quality assessment that led to the lake's current impaired status is found below. The assessment used the Iowa Lake Survey data from 2000 and 2001. This TMDL was developed using four years of Iowa Lake Survey data from 2000 to 2003.

ASSESSMENT EXPLANATION: Results of monitoring conducted by ISU in 2000 and 2001 as part of the statewide survey of Iowa lakes suggest that the Class A (primary contact) uses are only "partially supported." Using the median values from this survey in 2000 and 2001 (approximately six samples), Carlsons's (1977) trophic state indices for total phosphorus, chlorophyll-a, and secchi depth are 83, 58, and 80, respectively, for Storm Lake. According to Carlson (1977), the index values for total phosphorus and secchi depth places this lake in the mid to upper range of hyper-eutrophic lakes; the index value for chlorophyll-a is in the upper range of eutrophic lakes.

These index values suggest extremely high levels of phosphorus in the water column, relatively low (and less than expected) levels of chlorophyll-a, and very poor water

transparency. Given the high levels of phosphorus, the relatively low index for chlorophyll-a indicates less than expected production of suspended algae, probably due to high levels of turbidity related to suspended inorganic material in the water column or due to nitrogen limitation.

Data on inorganic suspended solids from the ISU survey suggest that this lake is subject to high levels of non-algal turbidity. The median level of inorganic suspended solids in the 130 lakes sampled for the ISU lake survey in 2000 and 2001 was 5.27 mg/l. The median level of inorganic suspended solids at Storm Lake (40.6 mg/l) was the second highest of the 130 lakes, thus suggesting that non-algal turbidity limits the production of algae as well as impairs beneficial uses. The relatively low ratio of total nitrogen to total phosphorus (5) also suggests a limitation on the production of chlorophyll.

The presence of the extremely high levels of total phosphorus in the water column indicates potential impairments to the Class A (primary contact) uses through presence of aesthetically objectionable blooms of algae and presence of nuisance algal species (i.e., bluegreen algae). Data from Downing et al. (2002) suggest that bluegreen algae (Cyanophyta), tend to dominate the summertime phytoplankton community of Storm Lake, especially in late summer). Sampling in 2000 showed the percent wet mass of bluegreens increased from just above 60% in the mid-June sampling to approximately 90% in early August sample.

Based on this information, turbidity-related impacts to the primary contact and aquatic life uses at this lake will be attributed primarily to non-algal turbidity and secondarily to suspended algae. The hyper-eutrophic conditions at this lake, along with information from the IDNR Fisheries Bureau, suggest that the Class B(LW) aquatic life uses are "partially supported" due to excessive nutrient loading to the water column, nuisance blooms of algae, and re-suspension of sediment.

The recently completed draft 2004 assessment for Storm Lake indicates continued impairment due to very high inorganic turbidity. It also notes a strong potential for nuisance algal blooms due to very high TP concentrations when the light limiting non-algal turbidity is reduced.

Data Sources

The two most important data sources used to develop this TMDL were:

- The *Storm Lake Restoration Diagnostic/Feasibility Study* completed in 1994. Samples were collected for this study 11 times from September 1992 to September 1993. Summarized results are shown in Table B-4.
- The *ISU Iowa Lakes Survey*, a planned five year survey of all the significant Iowa Lakes started in 2000. The survey monitoring consists of three growing season samples for each of 132 lakes, i.e., mid May to September. Data collected from 2000 to 2003 used to develop this TMDL are shown in Tables B-5, B-6, B-7, and B-8.

There have been several Storm Lake monitoring and water quality studies over the last 3 or 4 decades. Some of these were:

- Water quality surveys conducted on Storm Lake by Iowa State University in 1979 and 1990 (Bachmann et. al, 1980, Bachmann et. al, 1994). Samples were collected three times each summer for the lake studies conducted in 1979 and 1990. This data is shown in Tables B-1 and B-3.

- 1981-82 Storm Lake Water Quality Study, University of Iowa Hygienic Laboratory, (Kennedy and Splinter, 1982). Storm Lake was monitored three times at three locations in the lake. On each date, samples were collected from the surface and just above the lakebed. These results are shown in Table B-2 .
- Samples were collected by Buena Vista University in 2001 and 2003 and included data for several Storm Lake tributaries. This data is summarized in Table B-9.
- Members of the Storm Lake community have regularly measured secchi depth in 2004 and the collected data is in Table B-10.

Interpreting Storm Lake Water Quality Data

The primary data used to develop this TMDL are four years of data collected and analyzed for the Iowa Lake Study from 2000 to 2003. This is the most recent and complete data set available and includes the period when recent dredging operations began in 2002. The data collected for this evaluation of the Storm Lake water quality impairment includes transparency as measured by secchi depth, total suspended solids (TSS), inorganic suspended solids (ISS), volatile suspended solids (VSS), chlorophyll (CHL), and total phosphorous (TP). The following table shows these parameters and their relationship to turbidity (water clarity).

Table 4 Turbidity and its relationship to other parameters

Parameter	Physical Meaning
Turbidity	Properties of the water column that cause light to be scattered and absorbed, primarily caused by algal and inorganic TSS.
Secchi depth, meters	Measures water column transparency and used as a translator for turbidity.
TSS, mg/l	Solids residue captured on an 0.45 um filter and then dried at 105 C
ISS, mg/l (fixed solids)	Solids residue remaining after heating at 550 C. Approximates inorganic suspended solids in the water column.
VSS, mg/l	Weight lost after heating, VSS is the difference between TSS and ISS. In a lake most of the VSS will be algae.
Chlorophyll, mg/l	Chlorophyll is a measure of the algae concentration in the water column. Usually chlorophyll will be correlated with VSS.
Total phosphorous, mg/l	Total phosphorous is often the limiting factor in algal productivity. In the absence of light limitation TP would likely control the extent of algae blooms in this lake. Can be related to chlorophyll and secchi depth with the trophic state index in the absence of other limiting conditions.

As described in the Storm Lake water quality assessment, the main cause of the lake's turbid condition is non-algal turbidity, i.e., inorganic suspended solids. An evaluation of the ISU Iowa Lake Study data shows a strong correlation between TSS, ISS and secchi depth and no correlation between chlorophyll and secchi depth.

Figure 1 TSS versus secchi depth regression

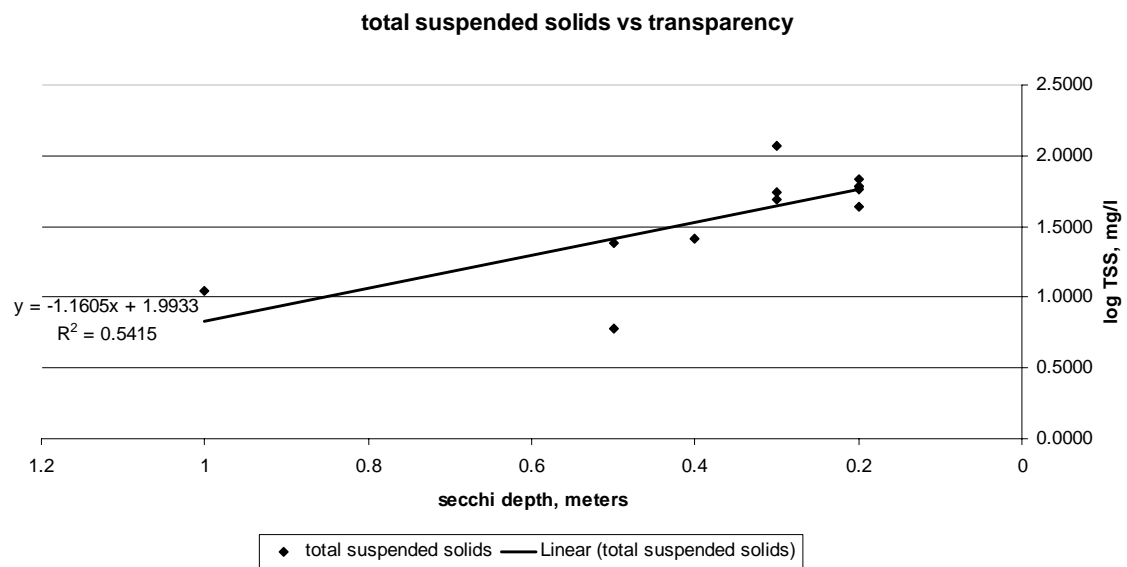


Figure 2 ISS versus secchi depth regression

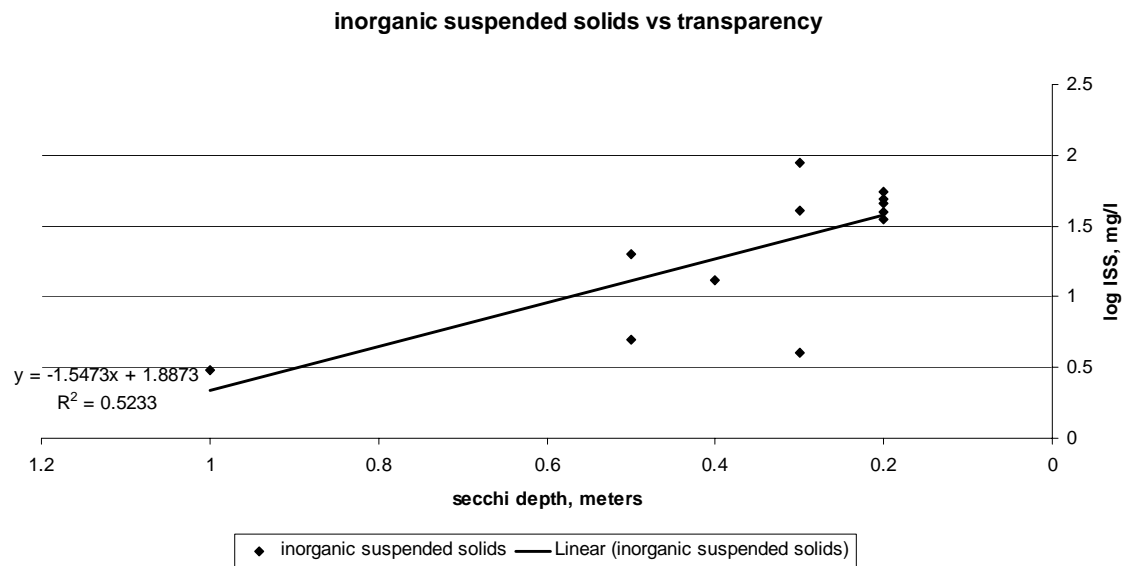


Figure 3 Chlorophyll versus secchi depth regression

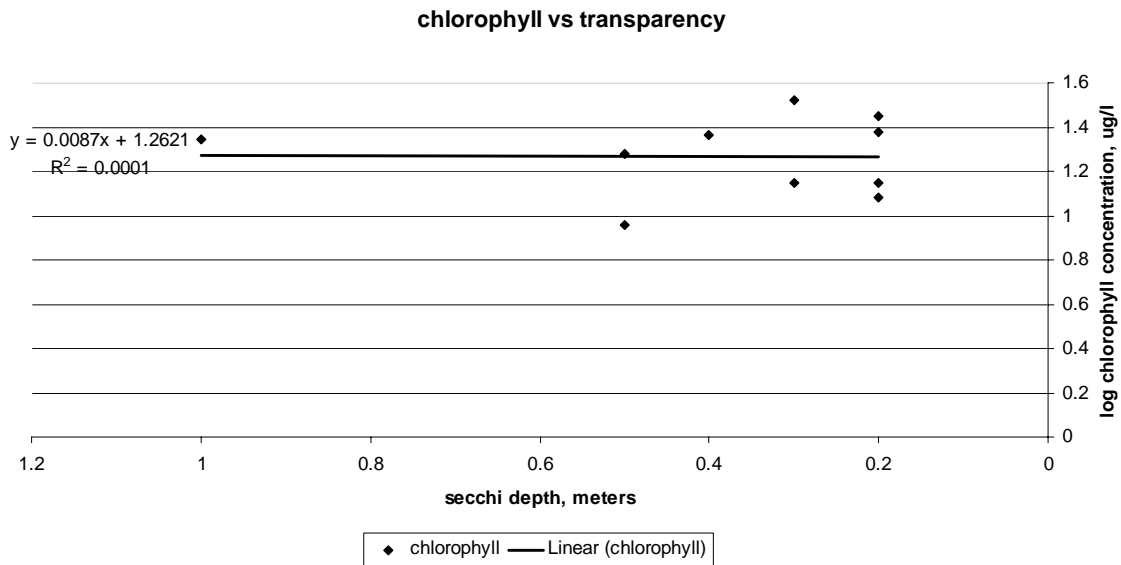


Table 5 Statistics for linear regressions of secchi depth vs. TSS, ISS, VSS, and chlorophyll

	r squared	r=correlation coefficient	p=probability of null hypothesis, n=12
Log TSS	0.54	0.73	0.01
Log ISS	0.52	0.72	0.01
Log VSS	0.15	0.39	Not significant, >0.05
Log Chl	0.00	0.00	Not significant, >0.05

The “r squared” term is an indication of how much of the variability in secchi depth is explained by the regression of TSS, ISS, VSS and chlorophyll with 1 being perfect correlation. The “r” term is the linear correlation coefficient and measures the linear association between the two variables. The “p” term is the likelihood that the variability is random and for TSS and ISS is 1 in 100. A p value less than or equal to 0.05 is considered significant for this document.


These statistics show that inorganic suspended solids cause the Storm Lake turbidity problem and that there is little correlation between algae and turbidity as measured by chlorophyll and secchi depth transparency. However, the presence of high concentrations of total phosphorous suggest that algal blooms may increase as non-algal turbidity decreases and light is not so limiting for algal growth. The following table shows the average secchi depth, total phosphorous, and chlorophyll and the associated TSI values for the 2000 to 2003 Iowa Lake Study data.

Table 6 Averages of Iowa Lake Study Data and associated TSI values

	Four year average	TSI calculated for average
Secchi depth	0.4 meters	73
Total phosphorous	153 ug/l	77
chlorophyll	20 ug/l	60

This table shows that the chlorophyll TSI value is much lower than that for total phosphorous and demonstrates that light and not TP is the limiting factor for algal growth. Carlson's Trophic State Index (TSI) is can be used to relate total phosphorus to chlorophyll and Secchi depth. (Appendix C includes an explanation of the TSI and its application to TMDL development.) The TSI comparison plot in Figure 1 shows (point in lower left hand quadrant) that there is a large phosphorus surplus, i.e., a significant fraction of TP is not expressed as algae. This indicates that non-algal turbidity is the major factor for reduced secchi depth transparency. Comparisons of the TSI values for chlorophyll, Secchi depth, and total phosphorus from Iowa Lake Survey data indicate limitation of algal growth from light attenuation by elevated levels of inorganic suspended solids.

Figure 4. Mean TSI Multivariate Comparison Plot of the Iowa Lake Survey data for Storm Lake

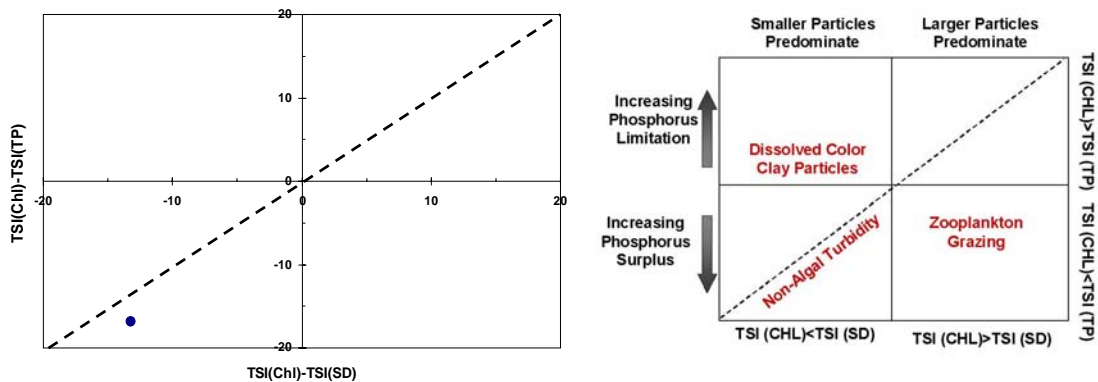

Potential Pollution Sources for Turbidity and Suspended Solids

Sediment and sediment attached phosphorus loading to Storm Lake originates primarily from internal resuspension of bottom sediment and less importantly from watershed nonpoint sources. The potential watershed sediment sources are delivered cropland sheet and rill erosion, shoreline erosion, streambank erosion, and gully erosion. Less significant potential watershed sources include urban runoff from the City of Storm Lake through storm sewers, construction and development activities, grasslands, and forest. There are no permitted point source discharges in the watershed. Lannie Miller, an IDNR fisheries biologist, has said that Storm has a very small rough fish population and they do not impact the turbidity.

The 1994 Diagnostic/Feasibility Study evaluated the sources of the turbidity problem in Storm Lake and concluded that the suspended matter is “caused by wind resuspension of bottom sediment that is a common problem of large shallow unprotected lakes such as Storm Lake”.

To support this conclusion, bathymetric surveys from 1916, 1935, 1972, and 1993 were used to evaluate historic siltation rates and the watershed model AGNPS (agricultural non-point source) was used to estimate watershed sediment delivery. The bathymetric data show that sediment delivery to Storm Lake is minimal since the estimated water volume hasn't varied much from 20,000 acre-feet since the first survey in 1916. The report concludes that the negligible sediment delivery to the lake is because the major tributary, Powell Creek, discharges into Little Storm Lake where most sediment settles before it can get to Storm Lake.

The AGNPS watershed modeling done for the 1994 Diagnostic /Feasibility Study using data from between 1954 and 1963 estimated the sediment delivery to the lake at an annual rate of 7 acre-feet per year (9,900 tons/year). More recently, it was estimated that sediment delivery from the watershed was 2.84 acre-feet/year (4,020 tons/yr) and 1.89 acre-feet per year (2,680 tons/yr) for 1998 and 1999 respectively.

In 2003, the Modified USLE watershed model was used to evaluate 2-inch rainfall event sediment delivery both with and without the Episcopal Creek sediment detention structure built in 2002. Delivery without the structure was 1463 tons and with the structure in place was 1327 tons providing a further decrease in sediment delivered to the lake.

In 2003 the Revised USLE model was run for the watershed and, assuming a delivery ratio of 20%, showed a delivery of 4,000 tons/year (2.82 acre-feet/yr). The unit sheet and rill erosion is 1.1 tons/yr/acre and the estimated unit sediment delivered to Little Storm Lake and Storm Lake is 0.22 tons/year/acre.

Seventy-five percent of the flow into Storm Lake discharges from Little Storm Lake, a 190 acre marshy water body. Except at very high flows, Little Storm Lake acts as a sediment trap further reducing the sediment delivered to Storm Lake.

All of this further supports the conclusions of the 1994 Diagnostic/Feasibility Study, that “the low overall sedimentation rate in the lake suggests that the filling in of local deeps is due to lake bottom dynamics including wave action and side slope instability ... and that silting of in of Storm Lake from erosion in the watershed is not a major problem.” It has also been noted by local IDNR Fisheries staff that resuspension of sediments by bottom feeding fish such as carp is a minor problem in Storm Lake supporting the conclusion that wind resuspension is the major factor for the turbidity impairment.

Wind resuspension

Based on the preceding analysis of watershed delivered sediment the conclusion of this TMDL is that the Storm Lake turbidity problem results mostly from the resuspension of bottom sediment by wind-driven waves and currents. The methods and some of the data used in the *Clear Lake, Iowa Diagnostic/Feasibility Study* are used to evaluate the influence of the wind on silt resuspension in Storm Lake. A paper resulting from the Clear Lake Study, *Physical Impacts of Wind and Boat Traffic on Clear Lake, Iowa*, makes an estimate of the wind impacts on Clear Lake.

Storm Lake and Clear Lake are similar in many respects, both are in the same north central Iowa eco-region in and both are shallow natural lakes of glacial origin. The table below compares the characteristics of these two waterbodies.

Table 7 Comparison of the characteristics of Storm and Clear Lakes

	Storm Lake	Clear Lake
Lake origin	Natural of glacial origin	Natural of glacial origin
Lake area	3150 acres	3630 acres
Mean depth	8 feet	9.5 feet
Max. depth	14 feet	19.3 feet

Watershed to lake area	4.4 to 1	2.3 to 1
Stratifies?	No	No
Length orientation	East to west	East to west
Approximate length	3.5 miles	5 miles
Water volume	25,940 acre-feet	34,800 acre-feet

For the Clear Lake Study the relationship between wind speed and prevailing direction, fetch, wave height, wave period, wavelength, and the frequency of wind-induced sediment resuspension was evaluated. At a depth of one half the wave's length or less, there begins a horizontal motion of the water over the lake bottom that can resuspend silt particles. If the fetch and wind speed are known then the wave period and length can be calculated and used to determine if the wave's base extends to the lake bottom. The following table shows the depth of a wave for a given combination of wind speed and fetch.

Table 8 Wave mixing depths for fetch distance and wind speed variables, feet

Fetch distance	Wind speed				
	8 mph	12 mph	16 mph	20 mph	24 mph
8,000 feet	4.2	6.7	9.1	11.6	14.0
12,000 feet	5.0	8.0	11.0	13.9	16.9
16,000 feet	5.6	9.1	12.5	15.9	19.3
20,000 feet	6.2	10.0	13.8	17.6	21.4

The mean depth of Storm Lake is 8 feet, the maximum depth is 14 feet, and the longest fetch is about 18,500 feet. This table shows that there is silt resuspension over large areas of the lake when the wind speed exceeds 12 mph. At wind speeds in excess of 20 mph there is a potential for most of the lake bottom to be disturbed.

The Clear Lake Resuspension Study used National Climatic Data Center wind speed data from a nearby station for the years 1998, 1999, and 2000. The annual data period used was from April to October to represent the ice-free season. The mean daily wind speed was 10 mph (4.6 m/s) and the mean daily maximum was 25 mph (11.3 m/s). The following table shows the percentage of time that the wind speed had a given range of values.

Table 9 Percentage of time wind speed is in a given range for Clear Lake, Iowa

Wind speed, mph	Wind speed, meters/sec	Fraction of time in range, %
0 to 11 mph	0 to 5	53 %
11 to 22 mph	5 to 10	45%
Greater than 22mph	Greater than 10	2%

Dredging to Increase Mean Depth

The 1994 diagnostic/feasibility study included recommendations for a program of dredging to increase the mean depth of the lake to 13 feet (4 m).

Recent dredging activities at Storm Lake were begun in 2002 and are planned to continue until half of the lake's surface area, about 1300 acres, has been dredged. The initial 2002 dredging project removed 1.3 million cubic yards of silt "downstream" of the inlet from Little Storm Lake in the northwestern part of Storm Lake. The depth of this

area was increased to a mean of 14 feet and a maximum of 18 feet. This dredging was an IDNR contract project and increased the depth in the dredged area from 6 to 10 feet.

In 2003 and 2004 the dredging continued in the southern part of the lake with local support.

2003: 150,000 cubic yards removed. Average depth after dredging is 14 feet and the maximum depth is 18 feet increasing depth from 6 to 10 feet.

2004: 699,000 cubic yards removed. The average depth after dredging is 16 feet and the maximum depth is 20 feet. This was an increase in depth of 8 to 12 feet.

Current plans are to continue dredging from 750,000 to one million cubic yards per year from 1300 acres of the lake until the mean depth is 13 to 14 feet.


Natural Background Conditions

Natural background contributions of turbidity and suspended solids were not separated from the total non-point source or resuspension loads.

3.2 TMDL Target

The Phase 1 turbidity targets for the Storm Lake TMDL are a secchi depth of 0.7 meters and a TSS concentration of 20 mg/l. The TSS concentration target is an estimate taken from the regression of the untransformed TSS and secchi depth data as shown in the following chart. If the regression equation is used to calculate the TSS concentration the value is 21 mg/l. The correlation coefficient “r” is 0.62 and the probability that “r” is greater than or equal to 0.62 is 0.034, falling within the 0.05 significance level selected previously.

Figure 5 TSS versus secchi depth regression

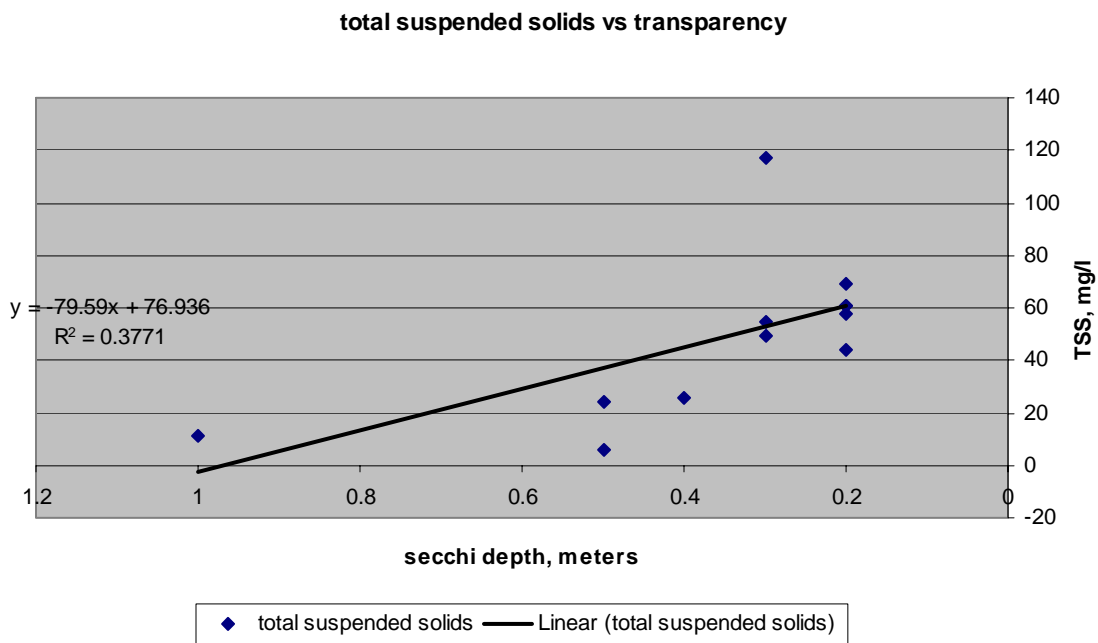

Criteria for Assessing Water Quality Standards Attainment

The State of Iowa does not have numeric water quality criteria for turbidity. The basis for the secchi depth target is the assessment criteria that a secchi depth TSI of 65, which is 0.7 m, provides water quality that is not “aesthetically objectionable”.

Selection of Environmental Conditions

The critical condition for which this turbidity TMDL applies is the entire year. An annual loading period was used to define Storm Lake’s resuspension and watershed sediment loads. Resuspension loads are primarily the result of periods of high wind stirring the lake bottom and secondarily boat traffic and rough fish. Watershed sediment loads are the result of precipitation events. Both resuspension and watershed runoff loads are best evaluated using average annual values.

Waterbody Pollutant Loading Capacity

The loading capacity for Storm Lake is the mass of suspended solids that meets the target value of 20 mg/l TSS. As derived in the TMDL target section, this concentration represents the target secchi depth of 0.7 meters. At this concentration, the total mass of suspended solids in the water column in the 30.8 million m³ lake volume is 680 tons. The following table shows the areal load (tons/acre) over a range of disturbed lake bottom area. As larger regions of the lake bottom are disturbed by waves, the allowable suspended solids load per acre decreases.

Table 10 Areal loading capacities

disturbed area, acres	areal load, t/acre 20 mg/l TSS (680 tons)	areal load, lb/sf 20 mg/l TSS (680 tons)
500	1.36	0.062
1000	0.68	0.031
1500	0.45	0.021
2000	0.34	0.016
2500	0.27	0.012
3000	0.23	0.010

3.3 Pollution Source Assessment

Existing Load

For this TMDL, the existing TSS load is that load that causes an average water column concentration of 48 mg/l, which is the average of the four years suspended solids data collected in the Iowa Lakes Survey. For the lake volume (30.8 million m³) and the existing average TSS concentration, the inventory of suspended solid is 1,620 tons. The following table shows the areal load for a range of disturbed lake bottom areas.

Table 11 Range of existing areal TSS loads

disturbed area, acres	areal load, t/acre 48 mg/l TSS (1620 tons)	areal load, lb/sf 48 mg/l TSS (1620 tons)
500	3.25	0.149
1000	1.63	0.075

1500	1.08	0.050
2000	0.81	0.037
2500	0.65	0.030
3000	0.54	0.025

Departure from Load Capacity

The difference between the existing TSS concentration of 48 mg/l and the acceptable concentration of 20 mg/l (secchi depth of 0.7 meters), is 28 mg/l. For the lake volume (30.8 million m³) and the existing average TSS concentration, the inventory of suspended solid is 1,620 tons. The following table shows the areal load for a range of disturbed lake bottom areas. These values represent the reductions necessary to meet the TSS target of 20 mg/l.

Table 12 Reductions in areal loadings for a range of disturbed lake bottom areas

disturbed area, acres	areal load, t/acre 28 mg/l TSS (950 tons)	areal load, lb/sf 28 mg/l TSS (950 tons)e
500	1.90	0.087
1000	0.95	0.044
1500	0.63	0.029
2000	0.48	0.022
2500	0.38	0.017
3000	0.32	0.015

Identification of Pollutant Sources

There are no point sources of TSS in the Storm Lake watershed. The primary non-point source is wind resuspension of bottom sediment. The secondary source of sediment is in runoff from the watershed, both agricultural and urban.

3.4 Pollutant Allocation

Wasteload Allocation

There are no permitted point source discharges in the Storm Lake watershed. Therefore, the wasteload allocations for this TMDL are zero.

Load Allocation

The load allocation for this TMDL is for an annual average water column total suspended solids concentration of 20 mg/l less a 10% margin of safety. This concentration will provide an increase in transparency as measured by secchi depth of 75% (from 0.4 to 0.7 meters) and a decrease in turbidity that will meet the water quality standards. This load is shown in the following table and is variable based on the area of disturbed lake bottom, i.e., as the disturbed area increases, the load allocation per acre decreases. As described previously, the areal load allocation is a function of lake depth and wavelength.

Load Allocation, based on lake bottom area disturbed by wind induced waves

Extent of wave disturbed lake bottom area, acres	Load Allocation, tons per disturbed lake bottom acre to achieve 20 mg/l TSS (612 tons total load)	Load per unit area, pounds/square foot of lake bottom (20 mg/l TSS at 612 tons total load)
500	1.22	0.0562
1000	0.61	0.0281
1500	0.41	0.0187
2000	0.31	0.0140
2500	0.24	0.0112
3000	0.20	0.0094

Margin of Safety

The margin of safety (MOS) of 68 tons for this TMDL is an explicit 10 percent reduction in the load allocation.

Total Daily Maximum Load Equation

$$\begin{aligned} \text{TMDL (Load capacity)} &= \text{Wasteload allocations} + \text{Load allocations} + \text{MOS} \\ &= \text{zero} + 612 \text{ tons} + 68 \text{ tons} \end{aligned}$$

This load capacity is applied to a range of disturbed lake bottom areas to provide an estimate of the allowable load for unit areas (tons/acre)

4. Implementation Plan

The Iowa Department of Natural Resources recognizes that an implementation plan is not a required component of a Total Maximum Daily Load. However, the IDNR offers the following implementation strategy to DNR staff, partners, and watershed stakeholders as a guide to improving water quality at Storm Lake.

The current plan for dredging the lake to a mean depth of 13 feet from 8 feet should provide significant improvement to water clarity problems resulting from inorganic turbidity. This is because the influence of wind driven waves on bottom sediments for typical Storm Lake fetch distances will be less frequent and have less intensity as the depth increases. This should also cause a significant reduction in water column total phosphorous concentrations since this nutrient is entrained with resuspended bottom sediments.

As the dredging progresses and the maximum and mean depths increase, the lake may become stratified in deeper areas, providing a sink for phosphorous. As the lake becomes more stratified internal mixing and recycling will be reduced.

Watershed land use also will have an impact on long term Storm Lake water quality. This will be particularly true as high phosphorous concentrations begin to cause algal blooms that were suppressed because of light limitations in the water column. The following best management practices are beneficial for reducing external nutrient (phosphorous) delivery.

- Manage agricultural soils for the optimum soil test category. This soil test category is the most profitable for producers to sustain in the long term.

- Minimize the potential losses of applied phosphorus by incorporating or subsurface applying the fertilizer or manure and avoiding late fall or winter applications.
- Maintain or improve forestry management practices to improve water infiltration.
- Encourage the adoption of management intensive grazing systems on the existing pastureland.
- Identify key locations in the watershed and construct wetlands or grade stabilization structures to settle out adsorbed and dissolved phosphorus in surface runoff.
- Through incentives and existing programs, reduce runoff volume and/or velocity through the strategic location of contour grass buffer strips and riparian buffer strips, etc.
- Control the nutrient content of urban runoff.

Finally, an evaluation of Little Storm Lake and its existing and future capacity to trap sediment should be evaluated. If this marshy area loses its ability to capture the majority of sediment from watershed runoff, then Storm Lake would be susceptible to siltation in the future.

5. Monitoring

The turbidity as measured by secchi depth is an important measure and is simple to perform. Frequent measurement of secchi depth at several locations in the lake should be done as well as the collection of wind speed and direction data, either from a nearby station or with an anemometer located at the lake. This data combined with bathymetric maps can provide guidance to the Storm Lake dredging operations that will be invaluable.

Additional monitoring is needed at Storm Lake to provide data for future water quality assessments. This monitoring should, at a minimum, meet the minimum data requirements established by Iowa's 305(b) guidelines for a complete water quality assessment (3 lake samples per year over 3 years, 10 lake samples over 2 years, etc.). This data will be collected by 2010. Storm Lake was included in the five-year lake study conducted by Iowa State University under contract with the IDNR. Although this lake monitoring program concluded in 2004, it may be extended under a new lake monitoring strategy.

The IDNR is committed to monitoring waters where TMDLs have been completed, and in the absence of a statewide lake monitoring program, follow-up monitoring will be conducted through the TMDL program.

6. Public Participation

Public meetings were held in Storm Lake regarding the proposed TMDL for turbidity for Storm Lake on November 20, 2003. Comments received were reviewed and given consideration and, where appropriate, incorporated into the TMDL. A second meeting is to be held January 26, 2005 in the Storm Lake City Hall Council Chambers at 6 PM.

7. References

Bachmann, R.W., M.R. Johnson, M.V. Moore, and T.A. Noonan. 1980. Clean lakes classification study of Iowa's lakes for restoration. Iowa Cooperative Fisheries Research Unit and Department of Animal Ecology, Iowa State University, Ames, Iowa. 715 p.

Bachmann, R.W., T.A. Hoyman, L.K. Hatch, and B.P. Hutchins. 1994. A classification of Iowa's lakes for restoration. Department of Animal Ecology, Iowa State University, Ames, Iowa. 517 p.

BVU. 2004. Personal Communication with Dr. Jon Hutchins. School of Science at Buena Vista University.

Downing, J.A. and J.M. Ramstack. 2001. Iowa Lakes Survey – Summer 2000 Data. Iowa State University, Department of Animal Ecology. January, 2001.

Downing, J.A. and J.M. Ramstack. 2002. Iowa Lakes Survey – Summer 2001 Data. Iowa State University, Department of Animal Ecology. January, 2002.

Downing, J.A., J.M. Ramstack, K. Haapa-aho, and K. Lee. 2003. Iowa lakes survey, summer 2002 data. Department of Animal Ecology, Iowa State University, Ames, IA. January, 2003. 394 pp.

EPA. 2000. Nutrient Criteria Technical Guidance Manual: Lakes and Reservoirs. Office of Water, USEPA. Washington, DC.

Hoyman, T.A., R. Lohnes, J.K. Sours, and D.L. Bonneau. 1994. Storm Lake restoration diagnostic/feasibility study. Iowa Department of Natural Resources. June 1994. 110 pp.

IAC. 2002. Chapter 567-61: water quality standards. Iowa Administrative Code [effective date 8/14/02].

Kennedy, J.O. and R.C. Splinter. 1982. Storm Lake water quality study: 1981-1982. Report 83-2. University Hygienic Laboratory, University of Iowa, Iowa City, Iowa. 16 p.

USDA-NRCS. 1998. Field Office Technical Guide Notice No. IA-198. "Erosion and Sediment Delivery Procedure", Section I, Erosion Protection.

USDA-NRCS. 1999. United States Department of Agriculture, Natural Resource Conservation Service. 1999. Soil Survey of Jefferson County, Iowa, Parts I and II.

8. Appendix A - Lake Hydrology

General Methodology

Purpose

There are approximately 127 public lakes in Iowa. The contributing watersheds for these lakes range in area from 0.028 mi² to 195 mi² with mean and median values of 10 mi² and 3.5 mi², respectively. Few, if any, of these lakes have gauging data available to determine flow statistics for the tributaries that feed into them. A select few have some type of stage information that may be useful in determining historical discharge from the lake itself.

With the large number of lakes on the State's 303(d) list and the requirement for rapid development of TMDLs for these lakes, it was realized that a method to quickly estimate flow statistics for required lake response model inputs would be desirable. In an attempt to achieve this goal, flow data and watershed characteristics for a number of USGS gauging stations with small contributing watershed areas were compiled and evaluated via both simple and multiple linear regressions. The primary focus of this evaluation was estimation of the average annual flow statistic for input to empirical lake response models. However, regression equations for monthly average and calendar year flow statistics were also developed that may be of additional use.

It should be noted that attempts were made to develop regression equations for low-flow streamflow statistics (1Q10, 7Q10, 30Q10, 30Q5 and harmonic mean) but the relationships derived were for the most part considered too weak (R^2 adj. < 70%) to be of practical use. One exception to this is the 30Q5 statistic, which gave an R^2 adj. of 85%. In addition, regression equations were developed for monthly flow prediction models for two months (January and May). Once again, the relationships did not exhibit a high level of correlation and due to the large amount of data required to develop these models, development of equations for additional months was not attempted.

Data

Flow data and watershed characteristics from 26 USGS gauging stations were used to derive the regression equations. The ranges of basin characteristics used to develop the regression equations are shown in Table A-1.

Drainage areas were taken directly from USGS gauge information available at <http://water.usgs.gov/waterwatch/>. Precipitation values were obtained through the Iowa Environmental Mesonet IEM Climodat Interface at <http://mesonet.agron.iastate.edu/climodat/index.phtml>. Where weather and gauging stations were not located in the same town, precipitation information was obtained from the weather station located in the town with the shortest straight-line distance from the gauging station.

Average basin slope and land cover percentages were determined using Arc View and statewide coverages clipped within HUC-12 sub-watersheds. It should be noted that the smallest basin coverages used in determining land cover percentages and average basin slopes were single HUC-12 units (i.e. no attempt was made to subdivide HUC-12 basins into smaller units where the drainage area was less than the area of the HUC-12

basin). Therefore, the regression models assume that for very small watersheds the land cover percentages of the HUC-12 basin are representative of the watershed located within the basin.

The Hydrologic Region for each station was determined from Figure 1 of USGS Water-Resources Investigation Report 87-4132, Method for Estimating the Magnitude and Frequency of Floods at Ungaged Sites on Unregulated Rural Streams in Iowa. None of the stations included in the analyses were located in Regions 1 or 5. This is reflected in the regression equations developed that utilize the hydrologic region as a variable.

Table A-1. Ranges of Basin Characteristics Used to Develop the Regression Equations

Basin Characteristic	Name in equations	Minimum	Mean	Maximum
Drainage Area (mi ²)	DA	2.94	80.7	204
Mean Annual Precip (inches)	\bar{P}_A	26.0	34.0	36.2
Average Basin Slope (%)	S	1.53	4.89	10.9
Landcover - % Water	W	0.020	0.336	2.80
Landcover - % Forest	F	2.45	10.3	29.9
Landcover - % Grass/Hav	G	9.91	31.3	58.7
Landcover - % Corn	C	6.71	31.9	52.3
Landcover - % Beans	B	6.01	23.1	37.0
Landcover - % Urban/Artificial	U	0	2.29	7.26
Landcover - % Barren/Sparse	B'	0	0.322	2.67
Hydrologic Region	H	Regions 1 - 5 used for delineation but data for USGS stations in Regions 2, 3 & 4 only.		

Methods

Simple regression models were developed for annual average and monthly average statistics with drainage area as the sole explanatory variable. Multiple linear regression models considering all explanatory variables were developed utilizing stepwise regression in Minitab. All data with the exception of the Hydrologic Region were log transformed. Explanatory variables with regression coefficients that were not statistically different from zero (p-value greater than 0.05) were not utilized.

Equation Variables

Table A-2. Regression Equation Variables

Annual Average Flow (cfs)	\bar{Q}_A
Monthly Average Flow (cfs)	\bar{Q}_{MONTH}
Annual Flow – calendar year (cfs)	Q_{YEAR}
Drainage Area (mi ²)	DA
Mean Annual Precip (inches)	\bar{P}_A
Mean Monthly Precip (inches)	\bar{P}_{MONTH}
Antecedent Mean Monthly Precip (inches)	\bar{A}_{MONTH}
Annual Precip – calendar year (inches)	P_{YEAR}
Antecedent Precip – calendar year (inches)	A_{YEAR}
Average Basin Slope (%)	S
Landcover - % Water	W
Landcover - % Forest	F
Landcover - % Grass/Hay	G
Landcover - % Corn	C
Landcover - % Beans	B
Landcover - % Urban/Artificial	U
Landcover - % Barren/Sparse	B'
Hydrologic Region	H

Equations

Table A-3. Drainage Area Only Equations

Equation	R ² adjusted (%)	PRESS (log transform)
$\bar{Q}_A = 0.832DA^{0.955}$	96.1	0.207290
$\bar{Q}_{JAN} = 0.312DA^{0.950}$	85.0	0.968253
$\bar{Q}_{FEB} = 1.32DA^{0.838}$	90.7	0.419138
$\bar{Q}_{MAR} = 0.907DA^{1.03}$	96.6	0.220384
$\bar{Q}_{APR} = 0.983DA^{1.02}$	93.1	0.463554
$\bar{Q}_{MAY} = 1.97DA^{0.906}$	89.0	0.603766
$\bar{Q}_{JUN} = 2.01DA^{0.878}$	88.9	0.572863
$\bar{Q}_{JUL} = 0.822DA^{0.977}$	87.2	0.803808
$\bar{Q}_{AUG} = 0.537DA^{0.914}$	74.0	1.69929
$\bar{Q}_{SEP} = 0.123DA^{1.21}$	78.7	2.64993
$\bar{Q}_{OCT} = 0.284DA^{1.04}$	90.2	0.713257
$\bar{Q}_{NOV} = 0.340DA^{0.999}$	89.8	0.697353
$\bar{Q}_{DEC} = 0.271DA^{1.00}$	86.3	1.02455

Table A-4. Multiple Regression Equations

Equation	R ² adjusted (%)	PRESS (log transform)
$\bar{Q}_A = 1.17 \times 10^{-3} DA^{0.998} \bar{P}_A^{1.54} S^{-0.261} (1+F)^{0.249} C^{0.230}$	98.7	0.177268 (n=26)
$\bar{Q}_{JAN} = 0.213 DA^{0.997} \bar{A}_{JAN}^{0.949}$	89.0	0.729610 (n=26; same for all \bar{Q}_{MONTH})
$\bar{Q}_{FEB} = 2.98 DA^{0.955} \bar{A}_{FEB}^{0.648} G^{-0.594} (1+F)^{0.324}$	97.0	0.07089
$\bar{Q}_{MAR} = 6.19 DA^{1.10} B^{-0.386} G^{-0.296}$	97.8	0.07276
$\bar{Q}_{APR} = 1.24 DA^{1.09} \bar{A}_{APR}^{1.64} S^{-0.311} B^{-0.443}$	97.1	0.257064
$\bar{Q}_{MAY} = 10^{(-3.03+0.114H)} DA^{0.846} \bar{P}_A^{2.05}$ Hydrologic Regions 2, 3 & 4 Only	92.1	0.958859
$\bar{Q}_{MAY} = 1.86 \times 10^{-3} DA^{0.903} \bar{P}_A^{1.98}$	90.5	1.07231
$\bar{Q}_{JUN} = 10^{(-1.47+0.0729H)} DA^{0.891} C^{0.404} \bar{P}_{JUN}^{1.84} (1+F)^{0.326} G^{-0.387}$ Hydrologic Regions 2, 3 & 4 Only	97.0	0.193715
$\bar{Q}_{JUN} = 8.13 \times 10^{-3} DA^{0.828} C^{0.478} \bar{P}_{JUN}^{2.70}$	95.9	0.256941
$\bar{Q}_{JUL} = 1.78 \times 10^{-3} DA^{0.923} \bar{A}_{JUL}^{4.19}$	91.7	0.542940
$\bar{Q}_{AUG} = 4.17 \times 10^7 DA^{0.981} (1+B')^{-1.64} (1+U)^{0.692} \bar{P}_A^{-7.2} \bar{A}_{AUG}^{4.59}$	90.4	1.11413
$\bar{Q}_{SEP} = 1.63 DA^{1.39} B^{-1.08}$	86.9	1.53072
$\bar{Q}_{OCT} = 5.98 DA^{1.14} B^{-0.755} S^{-0.688} (1+B')^{-0.481}$	95.7	0.375296
$\bar{Q}_{NOV} = 5.79 DA^{1.17} B^{-0.701} G^{-0.463} (1+U)^{0.267} (1+B')^{-0.397}$	95.1	0.492686
$\bar{Q}_{DEC} = 0.785 DA^{1.18} B^{-0.654} (1+U)^{0.331} (1+B')^{-0.490}$	92.4	0.590576
$Q_{YEAR} = 3.164 \times 10^{-4} DA^{0.942} P_{YEAR}^{2.39} A_{YEAR}^{1.02} S^{-0.206} \bar{P}_A^{1.27} C^{0.121} (1+U)^{0.0966}$	83.9	32.6357 (n=716)

General Application

In general, the regression equations developed using multiple watershed characteristics will be better predictors than those using drainage area as the sole explanatory variable. The single exception to this appears to be for the May Average Flow worksheet where the PRESS statistic values indicate that use of drainage area alone results in the least error in the prediction of future observations.

Although 2002 land cover grids for the state are now available with 19 different classifications, the older 2000 land cover grids with 9 different classifications were used in developing the regression equations. The 2000 land cover grids should be used in development of flow estimates using the equations.

The equations were developed from stream gauge data for watersheds with relatively minor open water surface percentages relative to other types of land cover (see Table A-1). For application to lake watersheds, particularly those with small watershed/lake area ratios, the basin slope and land cover percentages taken from HUC-12 basins may need to be adjusted so that the hydraulic budget components of surface inflow and direct precipitation on the lake itself can be treated separately. One method of accomplishing this is by subtraction of lake water surface acreage from the total land cover and slope (lakes will have 0% slope) acreages and recalculation of the % coverages. The watershed (drainage) area used in the equations should not include the area of the lake surface.

Application to Storm Lake - Calculations

Lake	Storm Lake	
Type	Natural w/inlet	
Inlet(s)	Powell Creek	
Outlet(s)	Outlet Creek	
Volume	24944	(acre-ft)
Lake Area	3051	(acres)
Mean Depth	8.2	(ft)
Drainage Area	14803	(acres)
Mean Annual Precip	30.9	(inches)
Average Basin Slope	1.9	(%)
%Water	0.3	
%Forest	3.2	
%Grass/Hay	22.4	
%Corn	41.5	
%Beans	30.1	
%Urban/Artificial	0.9	
%Barren/Sparse	1.2	
Hydrologic Region	3	
Mean Annual Class A Pan Evap	50.0	(inches)
Mean Annual Lake Evap	37.0	(inches)
Est. Annual Average Inflow	11180	(acre-ft)
Direct Lake Precip	7864	(acre-ft/yr)
Est. Annual Average Det. Time (inflow + precip)	1.31	(yr)
Est. Annual Average Det. Time (outflow)	2.59	(yr)

9. Appendix B - Sampling Data

Table B-1. Data collected in 1979 by Iowa State University (Bachmann, et al, 1980).

Date Collected	7/10/1979		8/13/1979			9/17/1979	
	0	1	0	1	2	0	1
Depth (meters)							
Secchi Depth (meters)	0.8		0.4			0.3	
Suspended Solids (mg/L)	10.2	14.6	33.8	31.3	24.1	39.8	39.3
Dissolved Oxygen (mg/L)	8.70	7.70	13.6	6.4	6.2	6.7	8.5
NO ₃ +NO ₂ -N (mg/L)						0.30	
Total Phosphate (mg/L) (colorimetric method)	0.0266	0.02	0.077	0.0703	0.0738	0.118	0.109
Chlorophyll a (ug/L) (Spectrophotometric Acid)	12.3	14.2		18.7	24.7	56.1	36.7

Table B-2. Data collected in 1981-82 by the University of Iowa Hygienic Laboratory (Kennedy and Splinter, 1982). For each date, samples were collected from the surface and near the bottom at three locations.

Parameter	10/5/1981		4/1/1982		6/30/1982	
	Range	Mean	Range	Mean	Range	Mean
Temperature (°C)	11	11	7	7	21-22	22
pH	8.3-8.4	8.35	8.0-8.2	8.2	8.4-8.5	8.4
Organic Nitrogen (mg/L)	0.27-0.48	0.37	1.1-1.4	1.2	0.61-0.75	0.67
Ammonia Nitrogen (mg/L)	<0.01-0.03	0.02	0.03-0.06	0.04	0.18-0.30	0.23
Nitrate Nitrogen (mg/L)	<0.01	<0.01	0.3-0.4	0.3	0.2	0.2
Filterable Phosphorus (mg/L)	0.0-0.1	0.01	0.13	0.13	0.03	0.03
Total Phosphorus (mg/L)	0.05-0.09	0.07	0.13-0.16	0.15	0.15-0.21	0.18
Dissolved Oxygen (mg/L)	9.4-9.6	9.4	11.1-11.3	11.2	7.9-9.4	8.4
BOD (mg/L)	2	2	3	3	1-2	2

Table B-3. Data collected in 1990 by Iowa State University (Bachmann, et al., 1994). Each sample was a composite water sample from all depths of the lake.

Date Collected	6/12/1990			7/13/1990			8/12/1990		
	1	2	3	1	2	3	1	2	3
Sample Number									
Secchi (inches)	0.4			0.7			0.3		
Suspended Solids (mg/L)	53.2	47.7	50	35	42.5	36.7	39.7	41.2	35.3
Total Nitrogen (mg/L)	2.4	1.9	2.4	1.5	1.5	1.4	1.2	1.8	1.2
Total Phosphorus (ug/L)	94	112	96	71	72	69	136	120	116
Chlorophyll a (ug/L) (Corrected)	38.7	38.7	41.9	32.1	29	31.4	62.8	70.6	59.7

Table B-4. Data collected in 1992-93 for the Storm Lake Restoration Study (Hoyman et al., 1994). Samples were collected from three depths (0.5m, 1.5m, 2.5m) in the deepest part of the lake. Values shown are averages over all sample dates. Sample sizes and standard error for each value are shown in parenthesis.

Parameter	Deepest part of Storm Lake	From Little Storm to Storm Lake	All inlets to Storm Lake	All inlets to Little Storm
Secchi Depth (m)	0.6 (13, 0.1)			
Chlorophyll (ug/L)	20.7 (35, 2.75)			
NO ₃ -N (mg/L)	0.77 (37, 0.08)	7.19 (12, 0.74)	5.95 (38, 0.71)	9.93 (9, 1.25)
Tot. Nitrogen (mg/L as N)	1.49 (35, 0.08)	7.48 (8, 0.66)	8.79 (30, 0.74)	11.26 (6, 1.37)
Tot. Phosphorus (ug/l as P)	92 (31, 10)	224 (10, 33)	155 (31, 43)	61 (8, 14)
pH	8.5 (34, 0.0)			
Alkalinity (mg/L)	149 (34, 2)			
Tot. Susp. Solids (mg/L)	24.1 (37, 2.48)	55.2 (12, 7.2)	27.5 (42, 6.85)	15.8 (10, 4.53)

Table B-5. Data collected in 2000 by Iowa State University (Downing and Ramstack, 2001)

Parameter	6/15/2000	7/14/2000	8/7/2000
Secchi Depth (m)	0.3	0.2	0.3
Chlorophyll (ug/L)	14	14	
NH ₃ +NH ₄ ⁺ -N (ug/L)	1273	1236	1568
NH ₃ -N (un-ionized) (ug/L)	70	211	159
NO ₃ +NO ₂ -N (mg/L)	0.54	0.12	0.11
Total Nitrogen (mg/L as N)	0.97	0.85	0.93
Total Phosphorus (ug/l as P)	269	256	277
Silica (mg/L as SiO ₂)	63	58	93
pH	8.2	8.5	8.3
Alkalinity (mg/L)	182	186	192
Total Suspended Solids (mg/L)	48.2	43.7	54.3
Inorganic Suspended Solids (mg/L)	40.5	34.7	40.7
Volatile Suspended Solids (mg/L)	7.7	8.9	13.6

Table B-6. Data collected in 2001 by Iowa State University (Downing and Ramstack, 2002)

Parameter	5/17/2001	6/14/2001	7/19/2001
Secchi Depth (m)	0.2	0.2	0.5
Chlorophyll (ug/L)		24	19
NH ₃ +NH ₄ ⁺ -N (ug/L)	1367	1	580
NH ₃ -N (un-ionized) (ug/L)	104	0	117
NO ₃ +NO ₂ -N (mg/L)	1.25	1.09	0.05
Total Nitrogen (mg/L as N)	1.82	1.48	1.25
Total Phosphorus (ug/l as P)	226	171	58
Silica (mg/L as SiO ₂)	35	18	14
pH	8.3	8.3	8.6
Alkalinity (mg/L)	175	176	121
Total Suspended Solids (mg/L)	60.5	68.5	5.9
Inorganic Suspended Solids (mg/L)	45.8	55.0	4.6
Volatile Suspended Solids (mg/L)	14.7	13.5	1.3

Table B-7. Data collected in 2002 by Iowa State University (Downing et al., 2003)

Parameter	5/23/2002	6/20/2002	7/25/2002
Secchi Depth (m)	1.0	0.4	0.2
Chlorophyll (ug/L)	22	23	12
NH ₃ +NH ₄ ⁺ -N (ug/L)	190	262	526
NH ₃ -N (un-ionized) (ug/L)	29	27	60
NO ₃ +NO ₂ -N (mg/L)	0.35	0.70	0.17
Total Nitrogen (mg/L as N)	1.13	1.62	1.21
Total Phosphorus (ug/l as P)	65	77	125
Silica (mg/L as SiO ₂)	1	5	8
pH	8.6	8.4	8.4
Alkalinity (mg/L)	157	151	175
Total Suspended Solids (mg/L)	11.0	26.2	58.6
Inorganic Suspended Solids (mg/L)	3.3	12.8	49.3
Volatile Suspended Solids (mg/L)	7.7	13.3	9.3
Dissolved Organic Carbon (mg/L)			9.8

Table B-8. Data collected in 2003 by Iowa State University (Downing et al., 2004)

Parameter	5/22/2003	6/19/2003	7/24/2003
Secchi Depth (m)	0.5	0.2	0.3
Chlorophyll (ug/L)	8.7	27.7	32.8
NH ₃ +NH ₄ ⁺ -N (ug/L)	381	449	585
NH ₃ -N (un-ionized) (ug/L)	18	62	74
NO ₃ +NO ₂ -N (mg/L)	0.70	0.16	0.55
Total Nitrogen (mg/L as N)	0.95	1.57	1.59
Total Phosphorus (ug/l as P)	73	91	146
Silica (mg/L as SiO ₂)	3.84	7.69	6.25
pH	8.2	8.5	8.5
Alkalinity (mg/L)	134	103	102
Total Suspended Solids (mg/L)	24	61	117
Inorganic Suspended Solids (mg/L)	20	40	89
Volatile Suspended Solids (mg/L)	4	21	28
Dissolved Organic Carbon (mg/L)	8.41	10.45	7.03

Additional lake sampling results and information can be viewed at:
<http://limnology.eeob.iastate.edu/>

Table B-9. Data from the 2001-03 Buena Vista University study (BVU, Pers. Comm.). PC is Powell Creek; LL is Little Storm Lake; IN is the inlet from Little Storm Lake into Storm Lake.


Date	pH			Nitrate (mg/l)			Turbidity (NTU)			Total P (ug/l)			TSS (mg/L)		
	PC	LL	IN	PC	LL	IN	PC	LL	IN	PC	LL	IN	PC	LL	IN
5/22/01	7.9	8.3	8.3	9.9	3.3	3.3	1.6	11	6.9						
5/30/01	7.7	7.6	7.6	6.2	3.4	1.7	8.5	90	140						
6/12/01	7.5	7.9	7.3	5	1.6	2.1	18	60	75						
6/19/01	7.7	7.8	7.5	10.5	0.7	2.7	15	60	85						
7/12/01						0.04			32						
7/18/01			7.4			0.04			85						
4/5/03								55	28						
4/13/03				0.8		0.4	3.6	25	43						
5/4/03	7.4	7.6	8.2	2.8	4.4	1.1	7	23	70						
5/17/03	7.5	8.2	7.7	1.7	2.2	6.1	2.3	24	26						
5/27/03	7.7	8.0	7.6	7.7	3.5	4.4	4.5	12	27						0.05
6/3/03	7.4	7.8	7.8	5.1	1.7	1.7	4.4	27	27	60	114	144	0.01	0.04	0.05
6/9/03	7.5	8.0	7.7	5.3	3.0	0.8	5.7	19	23	29	101	138	0.02	0.02	0.06
6/16/03	7.5	8.0	7.4	0.7	0.4	0.2	2.3	15	22	25	124	237	0.00	0.03	0.10
6/23/03	7.5	7.6	7.5	2.6	1.2	0.1	4.4	19	22	130	69	194	0.01	0.03	0.04
6/30/03	8.9	8.0	7.5	1.8	2.1	0.8	4.4	17	16	97	187	120	0.01	0.03	0.04
7/9/03	7.2	7.6	7.2	1.7	0.5	0.4	17	270	160	198	452	506	0.03	0.23	0.12
7/14/03	7.6	8.7	7.9	4.6	2.4	3.1	5.4	43	17	60	90	170	0.01	0.02	0.05
7/21/03	7.8	8.7	7.7	2.4	1.8	0.6	3.2	14	17	41	60	58	0.02	0.03	0.03
7/27/03	7.5	7.9	7.7	7.1	2.9	1.2	4.2	8.3	15	45	59	84	0.02	0.03	0.02

Table B-10. Daily Secchi depths (inches) recorded in Storm Lake at two locations.

Date	Bel Air	Sleepy Hollow	Date	Bel Air	Sleepy Hollow	Date	Bel Air	Sleepy Hollow
6/14/04	8		7/23/04		14	9/1/04	6	10
6/15/04	10		7/26/04		13	9/2/04	6	10
6/16/04	12		7/27/04	10	10	9/3/04		8
6/17/04	10		7/28/04	10	8	9/6/04		8
6/18/04	12		7/29/04		12	9/7/04		8
6/21/04	10		7/30/04		10	9/8/04	6	9
6/22/04	10		8/2/04		10	9/9/04	6	8
6/23/04		14	8/3/04	10	10	9/10/04	8	6
6/24/04	8	14	8/4/04	10	11	9/13/04	8	4
6/25/04		14	8/5/04		13	9/14/04	8	6
6/28/04		16	8/6/04	12	10	9/15/04	8	6
6/29/04	10	16	8/9/04		10	9/16/04	8	10
6/30/04	12	15	8/10/04	10	8	9/17/04	10	7
7/1/04		18	8/11/04		8	9/20/04		6
7/2/04	14	16	8/12/04		9	9/21/04		8
7/5/04	10	12	8/13/04		9	9/22/04	7	9
7/6/04		14	8/16/04		8	9/23/04		8
7/7/04	10	14	8/17/04	10	9	9/24/04	8	10
7/8/04	12	12	8/18/04		6	9/27/04		8
7/9/04	10	12	8/19/04	8	9	9/28/04		
7/12/04		10	8/20/04	8	11	9/29/04	8	9
7/13/04		14	8/21/04	10		9/30/04	8	9
7/14/04		16	8/22/04	8		10/1/04	8	8
7/15/04	10	14	8/23/04	8	10	10/4/04	8	11
7/16/04	10	15	8/24/04	8	10	10/5/04	8	8
7/17/04	12		8/25/04	9	8	10/6/04	10	8
7/19/04		14	8/26/04		8	10/7/04	10	8
7/20/04		14	8/27/04	6	11	10/8/04		10
7/21/04		14	8/30/04	6	10			
7/22/04		14	8/31/04	6	7			

Daily Secchi readings from June to October 2004 showed depths ranging from 0.5 to 0.1 m (Figure B1).

Figure B1. Daily Secchi disk readings collected from June through October 2004.

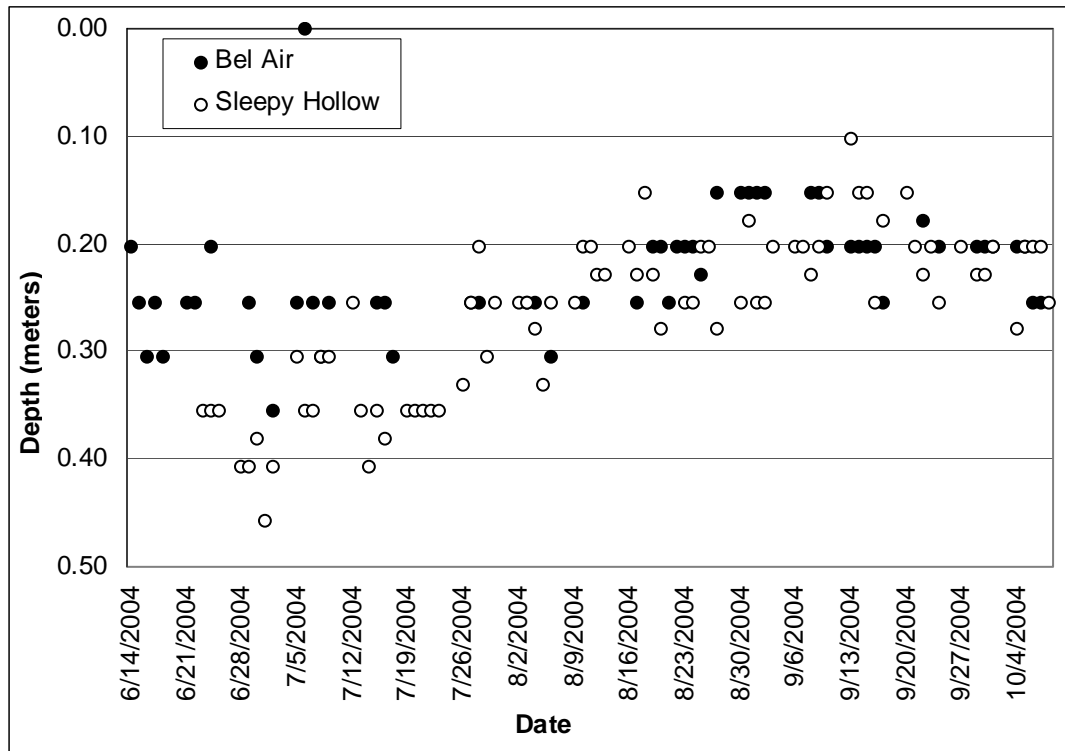

10. Appendix C - Trophic State Index

Carlson's Trophic State Index

Carlson's Trophic State Index is a numeric indicator of the continuum of the biomass of suspended algae in lakes and thus reflects a lake's nutrient condition and water transparency. The level of plant biomass is estimated by calculating the TSI value for chlorophyll-a. TSI values for total phosphorus and Secchi depth serve as surrogate measures of the TSI value for chlorophyll.

The TSI equations for total phosphorus, chlorophyll and Secchi depth are:

$$\text{TSI (TP)} = 14.42 \ln(\text{TP}) + 4.15$$

$$\text{TSI (CHL)} = 9.81 \ln(\text{CHL}) + 30.6$$

$$\text{TSI (SD)} = 60 - 14.41 \ln(\text{SD})$$

TP = in-lake total phosphorus concentration, ug/L

CHL = in-lake chlorophyll-a concentration, ug/L

SD = lake Secchi depth, meters

The three index variables are related by linear regression models and *should* produce the same index value for a given combination of variable values. Therefore, any of the three variables can theoretically be used to classify a waterbody.

Table C-1. Changes in temperate lake attributes according to trophic state (modified from U.S. EPA 2000, Carlson and Simpson 1995, and Oglesby et al. 1987).

TSI Value	Attributes	Primary Contact Recreation	Aquatic Life (Fisheries)
50-60	eutrophy: anoxic hypolimnia; macrophyte problems possible	[none]	warm water fisheries only; percid fishery; bass may be dominant
60-70	blue green algae dominate; algal scums and macrophyte problems occur	weeds, algal scums, and low transparency discourage swimming and boating	Centrarchid fishery
70-80	hyper-eutrophy (light limited). Dense algae and macrophytes	weeds, algal scums, and low transparency discourage swimming and boating	Cyprinid fishery (e.g., common carp and other rough fish)
>80	algal scums; few macrophytes	algal scums, and low transparency discourage swimming and boating	rough fish dominate; summer fish kills possible

Table C-2. Summary of ranges of TSI values and measurements for chlorophyll-a and Secchi depth used to define Section 305(b) use support categories for the 2004 reporting cycle.

Level of Support	TSI value	Chlorophyll-a (ug/l)	Secchi Depth (m)
fully supported	<=55	<=12	>1.4
fully supported / threatened	55 → 65	12 → 33	1.4 → 0.7
partially supported (evaluated: in need of further investigation)	65 → 70	33 → 55	0.7 → 0.5
partially supported (monitored: candidates for Section 303(d) listing)	65-70	33 → 55	0.7 → 0.5
not supported (monitored or evaluated: candidates for Section 303(d) listing)	>70	>55	<0.5

Table C-3. Descriptions of TSI ranges for Secchi depth, phosphorus, and chlorophyll-a for Iowa lakes.

TSI value	Secchi description	Secchi depth (m)	Phosphorus & Chlorophyll-a description	Phosphorus levels (ug/l)	Chlorophyll-a levels (ug/l)
> 75	extremely poor	< 0.35	extremely high	> 136	> 92
70-75	very poor	0.5 – 0.35	very high	96 - 136	55 – 92
65-70	poor	0.71 – 0.5	high	68 – 96	33 – 55
60-65	moderately poor	1.0 – 0.71	moderately high	48 – 68	20 – 33
55-60	relatively good	1.41 – 1.0	relatively low	34 – 48	12 – 20
50-55	very good	2.0 – 1.41	low	24 – 34	7 – 12
< 50	exceptional	> 2.0	extremely low	< 24	< 7

The relationship between TSI variables can be used to identify potential causal relationships. For example, TSI values for chlorophyll that are consistently well below those for total phosphorus suggest that something other than phosphorus limits algal growth. The TSI values can be plotted to show potential relationships as shown in Figure C-1.

11. Appendix D - Maps

Figure D-1. 2003 land uses in the Storm Lake watershed.

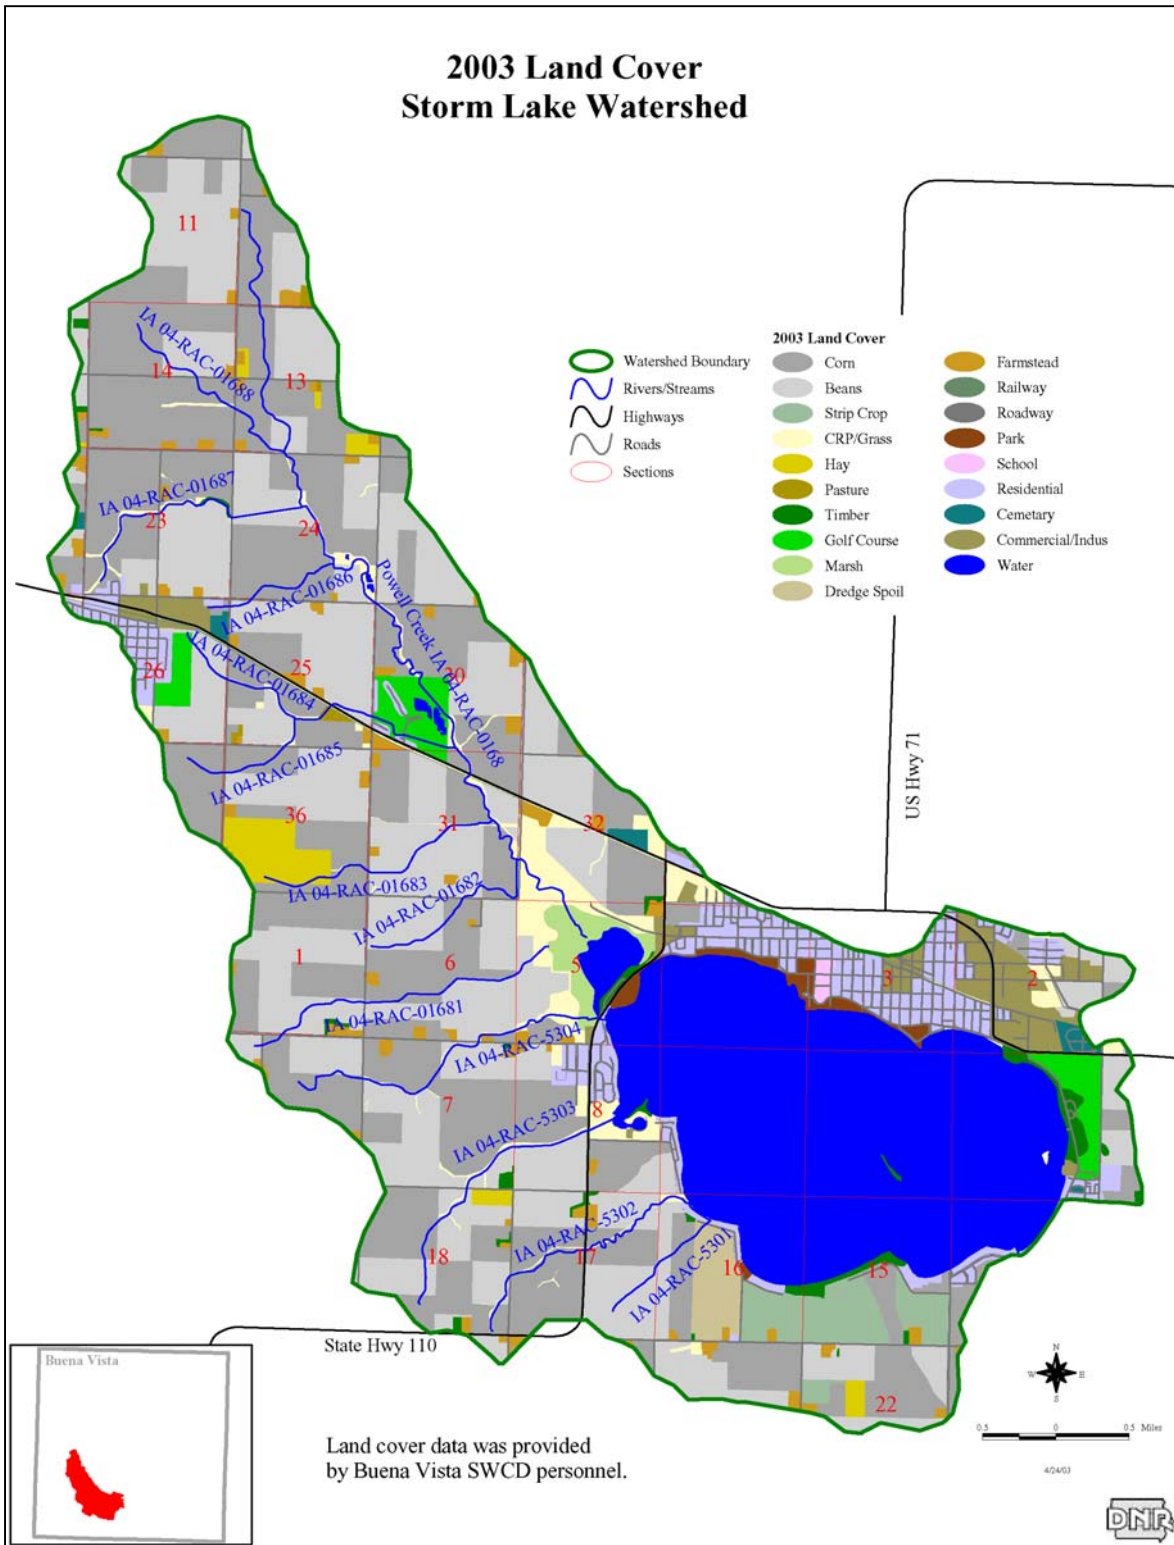


Figure D-2. Soil loss (RUSLE) coverage for the Storm Lake watershed.

